Distributed by:

JAMECO® ELECTRONICS

www.Jameco.com ✦ 1-800-831-4242

The content and copyrights of the attached material are the property of its owner.

Jameco Part Number 224231 (02-09-1104-C)

PART NO.	ENG. NO.
02-09-1104	1189-A(P901)L
02-09-1102	1189-A(P901)





SECT. "A-A"



SECT. "B-B"

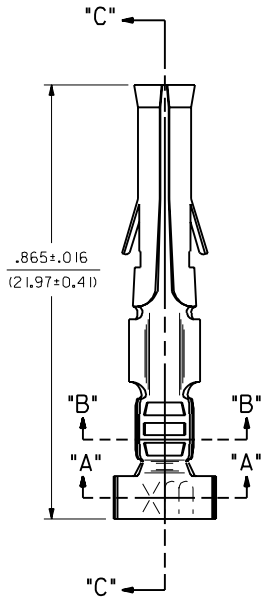

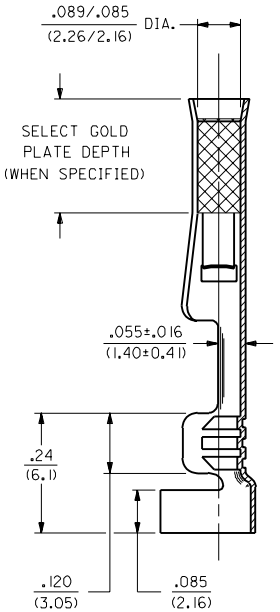

SECT. "C-C"

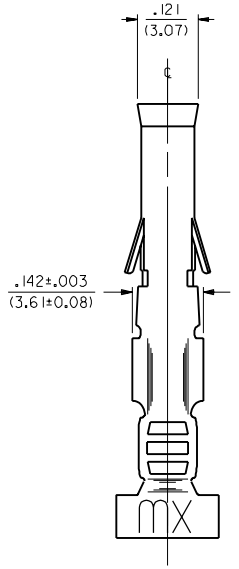

LEGEND

1189-A(****)*

- FORM: BLANK=CHAIN, L=LOOSE
- FINISH CODE
- P=PREPLATE, BLANK=POSTPLATE

NOTES:

1. TERMINAL FOR USE WITH .093/(2.36) SERIES HOUSINGS AND WILL ACCEPT 14 THRU 20 AWG WIRE.
2. INSERTION FORCE: 3.5 LBS. MAX. WHEN TERMINAL IS INSERTED INTO AN .093 SERIES HOUSING.
3. RETENTION: 20 LBS. MIN. FROM HOUSING.
4. THIS PART CONFORMS TO PROD. SPEC. 02-09.

FINISH CODES:

901 HOT TIN DIP .000020/(0.00051) MIN.

914 HOT TIN-LEAD DIP .000040/(0.00102) MIN.

565 SELECT GOLD PLATE .000020/(0.00051) MIN. IN CONTACT AREA, OVER .000030/(0.00076) MIN. NICKEL OVERALL WITH .000010/(0.00025) MAX. GOLD FLASH OVERALL.

591 SELECT GOLD PLATE .000050/(0.00127) MIN. IN CONTACT AREA, OVER .000050/(0.00127) MIN. NICKEL OVERALL WITH .000010/(0.00025) MAX. GOLD FLASH OVERALL.

550 SELECT GOLD PLATE .000015/(0.00038) MIN. IN CONTACT AREA, OVER .000030/(0.00076) MIN. NICKEL OVERALL WITH .000010/(0.00025) MAX. GOLD FLASH OVERALL.

558 SELECT GOLD PLATE .000030/(0.00076) MIN. IN CONTACT AREA, OVER .000050/(0.00127) MIN. NICKEL OVERALL WITH .000010/(0.00025) MAX. GOLD FLASH OVERALL.

MATERIAL:

CARTRIDGE BRASS, ALLOY #C26000, .010/(0.25) THICK, SPRING TEMPER.

CHAIN FORM
FULL SCALE



MFG.	SH.	REV.	LTR.	REVISIONS
			BT	OBS. VER'S. PER ECR U6 0543 GC 11/2/95 RW
			BS	REVISE PER ECR U5 0799 GC 2/10/95 RW
			BR	CARRIER CUTOFF ECR #U1 0223 1-4-91 RW
			BP	REV. & REDRAWN ECR 10480 GEP 10-26-87 RW

▽=0 ▼=0 REVISE ONLY ON CAD SYSTEM

DIMENSIONS SHOWN (METRIC) INCH
UNLESS OTHERWISE SPECIFIED TOLERANCES: ANGULAR ± 1/2°

	INCH	METRIC
3 PLACE	± .010	---
2 PLACE	± .014	± 0.25
1 PLACE	---	± 0.35

DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS

DRWG. BY GEP | CHK'D. BY RW | APP'D. BY RAS | SCALE 6 : 1

TITLE: CRIMP TERM., FEMALE .093/(2.36) DIA. FOR 14 THRU 20 AWG. WIRE

molex MOLEX INCORPORATED LISLE,ILL. 60532 U.S.A. | SHEET NO. 1 OF 1 | DATE 10/26/87

PART NO. SEE CHART | DRWG. NO. SD-1189-•

FILE NAME SD1189X1.DGN

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INC. AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION

DIV. CP | SIZE C

1189